




***VPC***  
***Vertical Turbine, Double Case Pump***



***Experience In Motion***

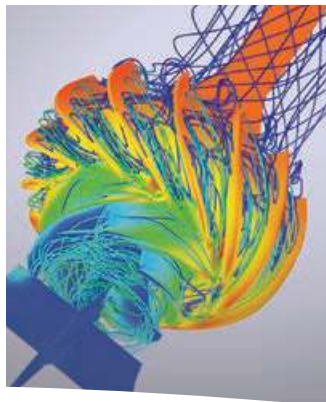

## **Pump Supplier to the World**

*Flowserve is the driving force in the global industrial pump marketplace. No other pump company in the world has the depth or breadth of expertise in the successful application of pre-engineered, engineered, and special purpose pumps and systems.*

### **Life Cycle Cost Solutions**

Flowserve provides pumping solutions that permit customers to reduce total life cycle costs and improve productivity, profitability and pumping system reliability.

### **Market-Focused Customer Support**

Product and industry specialists develop effective proposals and solutions directed toward market and customer preferences. They offer technical advice and assistance throughout each stage of the product life cycle, beginning with the initial inquiry.

### **Broad Product Lines**

Flowserve offers a wide range of complementary pump types, from pre-engineered process pumps to highly engineered and special purpose pumps and systems. Pumps are built to recognized global standards and customer specifications.

Pump designs include:

- Single-stage process
- Between bearings single-stage
- Between bearings multistage
- Vertical
- Submersible motor
- Positive displacement
- Nuclear
- Specialty

### **Product Brands of Distinction**

*ACEC™*

*Aldrich™*

*Byron Jackson®*

*Calder™ Energy Recovery Devices*

*Cameron™*

*Durco®*

*Flowserve®*

*HALBERG™*

*IDP®*

*INNOMAG®*

*Lawrence Pumps®*

*Niigata Worthington™*

*Pacific®*

*Pleuger®*

*Scienco™*

*Sier-Bath®*

*SIHI®*

*TKL™*

*United Centrifugal®*

*Western Land Roller™*

*Wilson-Snyder®*


*Worthington®*

*Worthington Simpson™*

**VPC  
Vertical Turbine,  
Double Case  
Pump**



**Complementary Pump Designs**

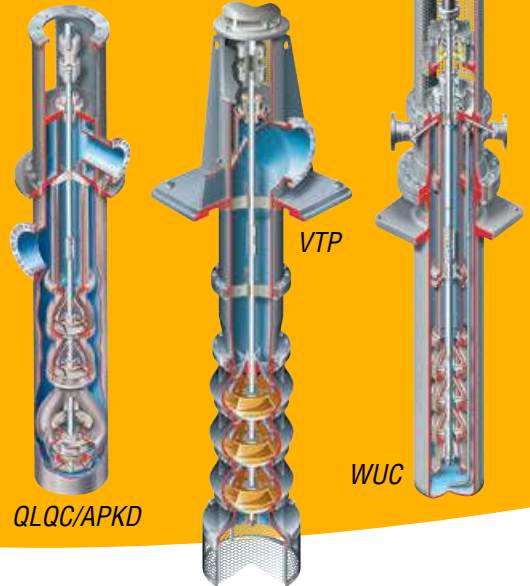

**Unequaled Hydraulic Coverage  
and Design Flexibility**

The Flowserve VPC is a double case, diffuser type, vertical turbine pump. Available in single or multistage construction, as well as standard and ISO 13709/API 610 compliant designs, the VPC incorporates the proven hydraulics of the Flowserve VTP vertical turbine pump into a double case configuration. It is designed for continuous duty applications and is particularly well suited for services with limited NPSH.

**Engineered Flexibility**

VPC pumps are available in a wide variety of configurations, constructions and materials to suit application requirements. Among the options are:

- Standard and ISO 13709/API 610 (VS6), latest edition configurations
- Enclosed or semi-open impellers, keyed or collet mounted
- Bowl and enclosed impeller wear rings
- Fabricated steel discharge head and suction can
- Sealing configurations
  - Packed box with flexible graphite packing
  - Single- or dual-mechanical seal
- Above- or below-ground suction flanges
- Multiple drivers
  - Electric motors, solid or hollow shaft
  - Engines with right angle gears
  - Steam turbines
- Internal and external suction can drains
- Separate axial thrust bearing assembly

**Applications**

- Hydrocarbon booster
- Hydrocarbon transfer
- Pipeline booster
- Petrochemical transfer
- Condensate
- Water supply
- Water transfer
- Snowmaking
- Brine injection
- Heater drain

**Complementary Pump Designs**

Flowserve also can provide the following complementary pumps:

- VTP vertical turbine, wet-pit pump
- APKD, QLC and QLQC double case, double-suction, double volute pumps
- WUC ISO 13709/API 610 (VS6) vertical, multistage, double case process pump
- VCT vertical mixed flow pump
- LNN between bearing, axially split, single-stage, double-suction pump



**VPC**  
**Vertical Turbine, Double**  
**Case Pump**

*The VPC is designed for a variety of applications where a wet well is not available or there is limited NPSH available. Its broad hydraulic coverage is well complemented by its versatility in applications. The VPC meets the design requirements of international standards, including ANSI, AWWA, ASME and Hydraulic Institute.*

**Operating Parameters**

- Flows to 13 600 m<sup>3</sup>/h (60 000 gpm)
- Heads to 1070 m (3500 ft)
- Pressures to 100 bar (1450 psi)
- Temperatures from -45°C (-50°F) to 230°C (450°F)

**Features and Benefits**

**Solid Shaft Motor** includes thrust bearing to withstand the total hydraulic thrust as well as the rotor weight. Shaft extension allows the motor to be coupled to the pump.

**Fabricated Steel Discharge Head** with ASME Class 150 or 300 slip-on flanges. Functions as a mounting base for the motor or other driver combination.

**Rigid, Adjustable Flanged Coupling** provides the proper impeller clearance adjustment.


**Fabricated Steel Suction Can** creates optimum hydraulic conditions through the suction flange inlet into the suction bell.

**Open Lineshaft Construction** allows the lineshaft bearings to be lubricated by the pumped fluid.


**Bowls** are designed with multiple diffuser vanes and flanged construction. Bowl bearings on either side of the impeller provide rigid support to the shaft.

**Enclosed or Semi-open Impellers** are cast to provide smooth passageways for more efficient fluid flow. First-stage impeller is available with low NPSH design.

**Suction Bell** is designed to provide efficient fluid flow into the eye of the first-stage impeller.

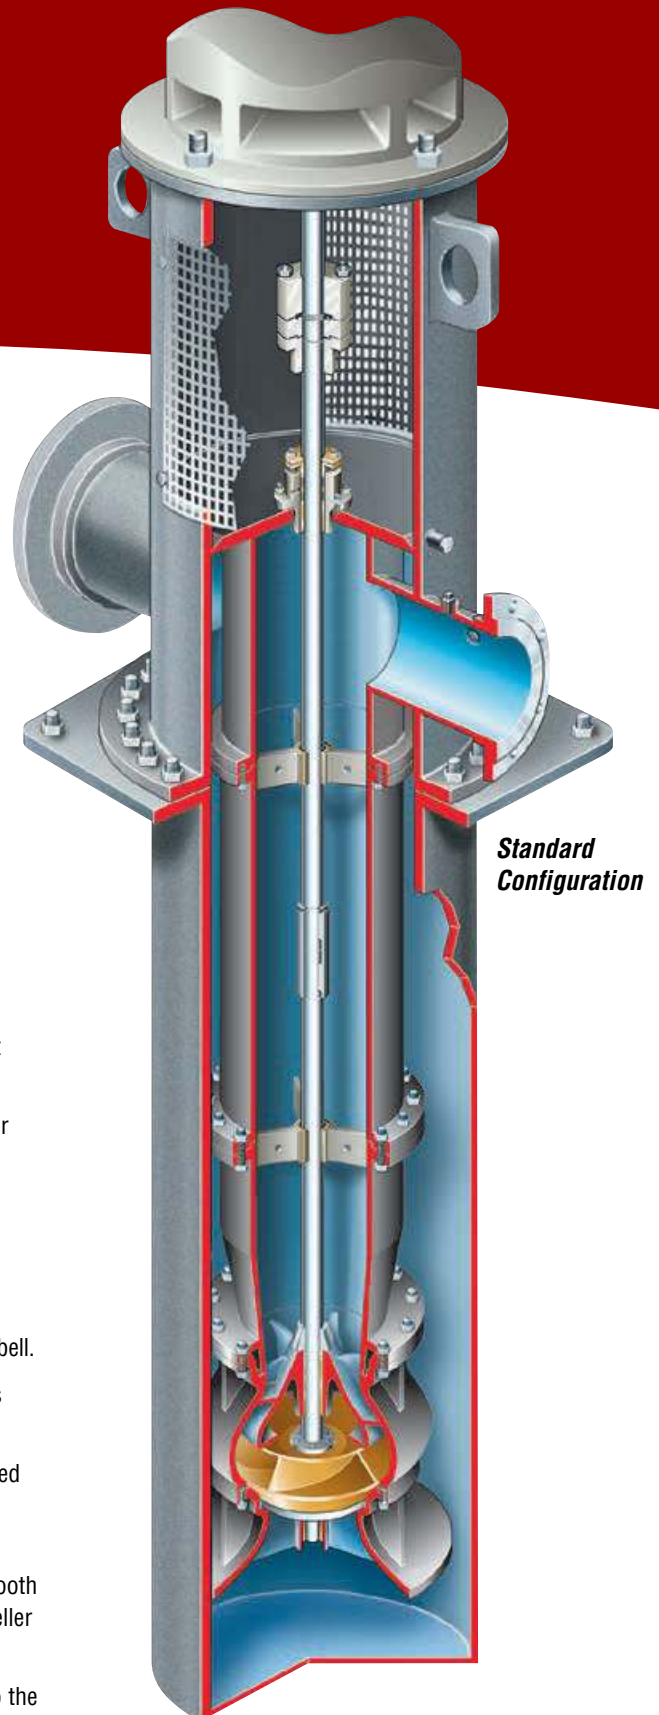

**VPC**  
**ISO 13709/API 610 (VS6)**  
**Vertical Turbine, Double**  
**Case Pump**

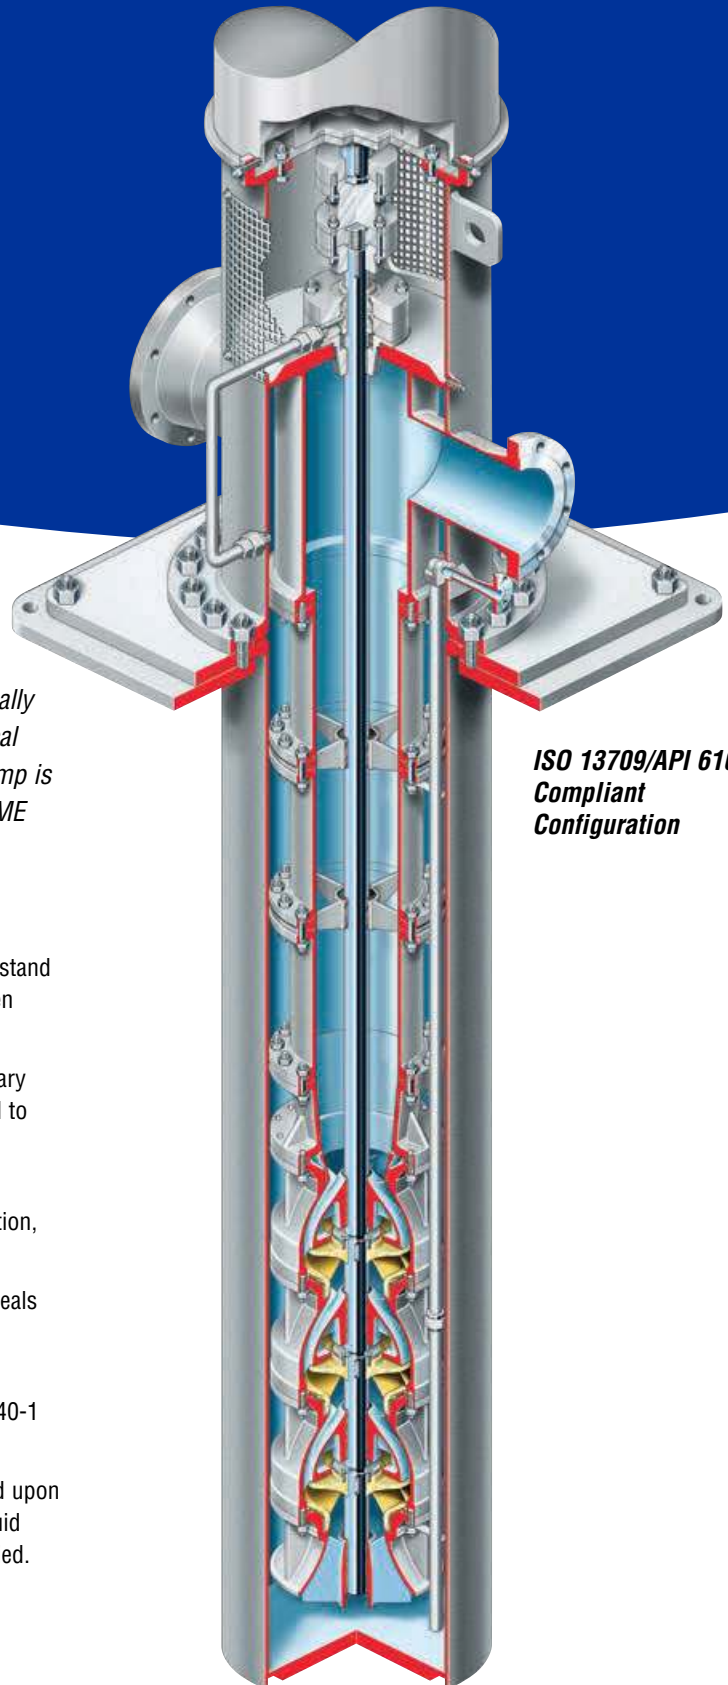

**ISO 13709/API 610**  
**Compliant**  
**Configuration**

*Design flexibility makes the VPC ideal for process applications. For the aggressive applications typically found in the oil and gas, hydrocarbon and chemical industries, a heavy-duty VPC is available. This pump is compliant with ISO 13709/API 610 (VS6) and ASME Section VIII and IX design requirements.*

**Features and Benefits**

**Heavy-duty ASME Pressure Casing** is designed to withstand the maximum allowable working pressure (MAWP), even under API's specified corrosion conditions.

**Weld-neck Flanges** on all suction, discharge and auxiliary connections provide increased MAWP and are designed to withstand API nozzle loadings.

**One-piece Pump Shaft** eliminates threaded lineshaft couplings and the increased shaft run-out, higher vibration, and weaker joints associated with them.

**Seal Chamber** with jackscrews accepts single or dual seals and enables mating parts to be separated easily during disassembly. Plan 13 provides continuous venting.




**Dynamically Balanced Enclosed Impellers** per ISO 1940-1 grade G2.5.

**Flanged Vent Connection** allows the pump to be vented upon initial operation. It can also be pressurized to purge liquid from the suction can when a suction can drain is supplied.

**Studs and Nuts** prevent thread damage common with capscrew removal.

**Precision Rigid, Adjustable Flanged Spacer Coupling** provides easy impeller lift adjustment and allows seal removal without disturbing the motor.

**Options and Technical Data**

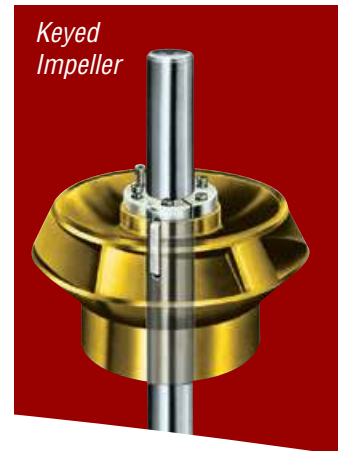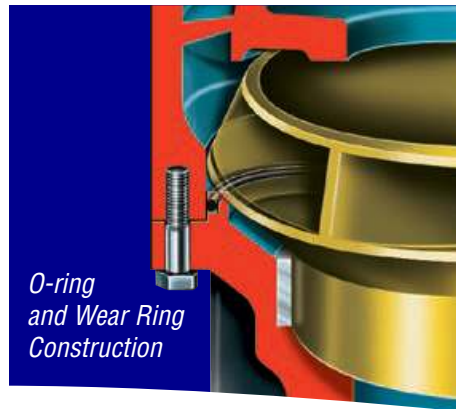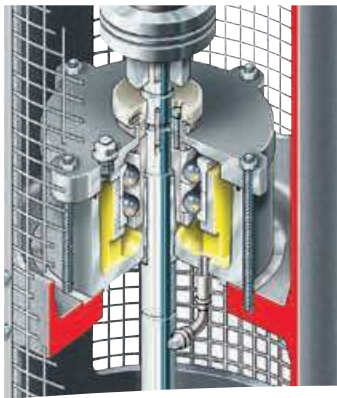

**Integral Axial Thrust Bearing Assembly**

The axial thrust bearing assembly withstands the total hydraulic thrust as well as the rotor weight. Self-lubricating, anti-friction bearings are utilized for standard applications. The integral axial thrust bearing assembly is available on VPC pumps with IEC motors.

**Mechanical Seal**


- Pressures to 105 bar (1500 psi)
- No leakage
- Easy access for maintenance and parts replacement
- Single and dual arrangements are available
- Multiple seal piping plans are available

**Available Options**


- O-ring construction
- Bowl and impeller wear rings
- Keyed impellers

**Suction Configurations**

VPC pumps are available with above- or below-ground suction flanges to suit site conditions.

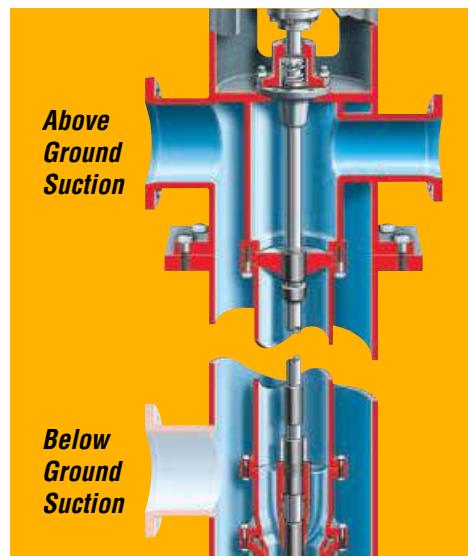

**Range Chart**

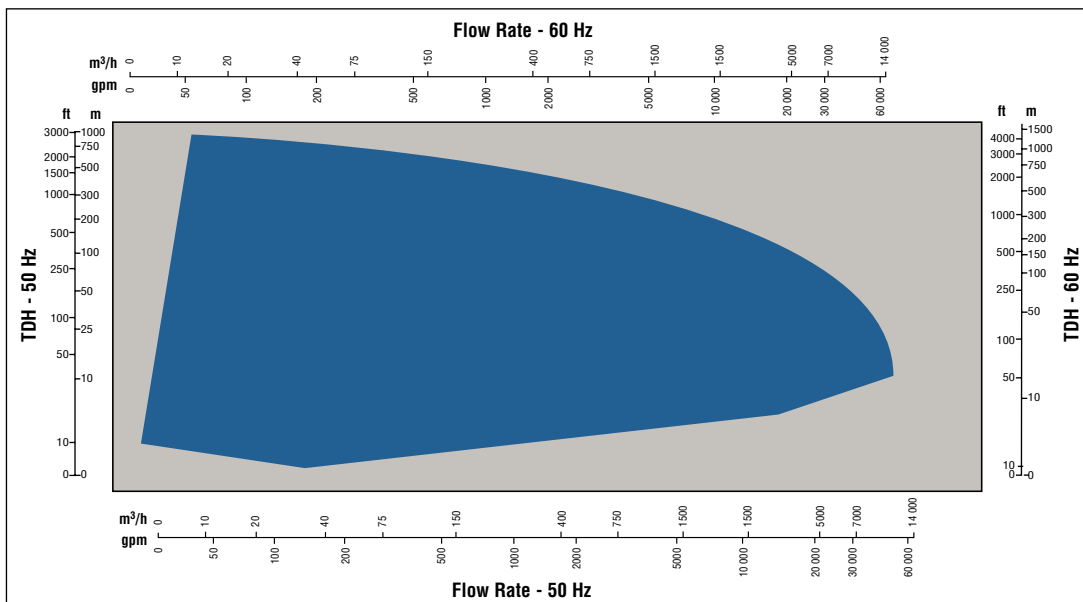



Global Service  
and Technical  
Support



## Life Cycle Cost Solutions

Typically, 90% of the total life cycle cost (LCC) of a pumping system is accumulated after the equipment is purchased and installed. Flowserve has developed a comprehensive suite of solutions aimed at providing customers with unprecedented value and cost savings throughout the life span of the pumping system. These solutions account for every facet of life cycle cost, including:

**Capital Expenses**

- Initial purchase
- Installation


**Operating Expenses**

- Energy consumption
- Maintenance
- Production losses
- Environmental
- Inventory
- Operating
- Removal


### Innovative Life Cycle Cost Solutions

- New Pump Selection
- Turnkey Engineering and Field Service
- Energy Management
- Pump Availability
- Proactive Maintenance
- Inventory Management

### Typical Pump Life Cycle Costs<sup>1</sup>

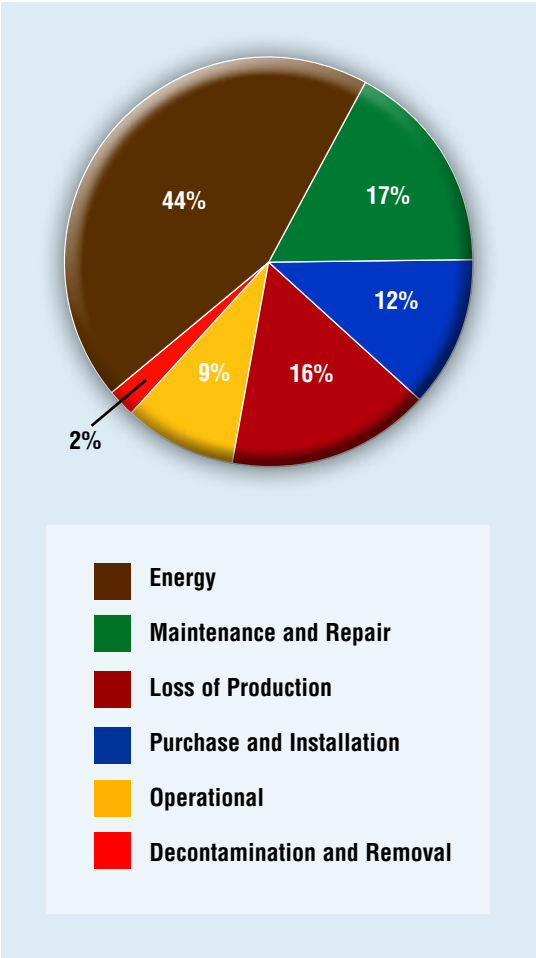

<sup>1</sup> While exact values may differ, these percentages are consistent with those published by leading pump manufacturers and end users, as well as industry associations and government agencies worldwide.

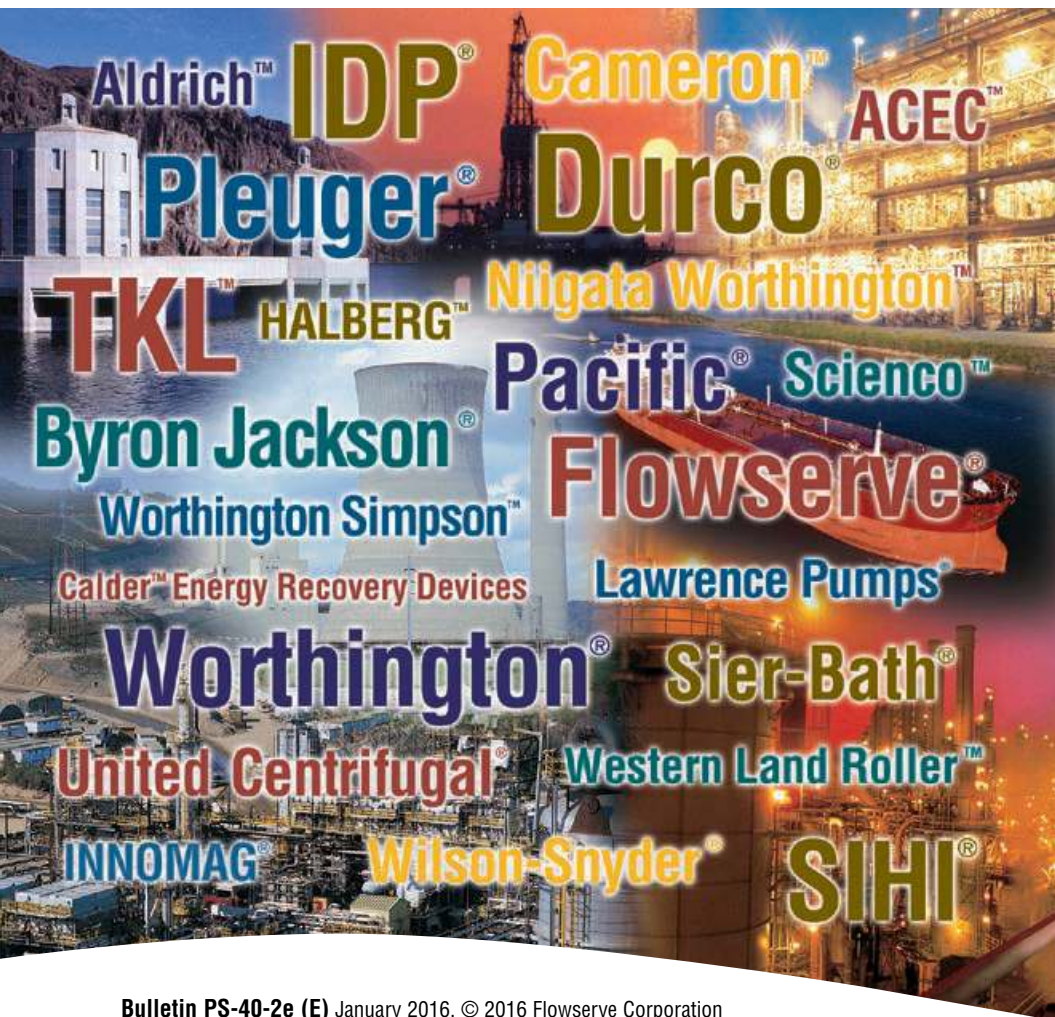

**USA and Canada**

Flowserve Corporation  
5215 North O'Connor Blvd.  
Suite 2300  
Irving, Texas 75039-5421 USA  
Telephone: +1 937 890 5839

**Europe, Middle East, Africa**

Flowserve Corporation  
Parallelweg 13  
4878 AH Etten-Leur  
The Netherlands  
Telephone: +31 76 502 8100

**Latin America**

Flowserve Corporation  
Martín Rodríguez 4460  
B1644CGN-Victoria-San Fernando  
Buenos Aires, Argentina  
Telephone: +54 11 4006 8700  
Telefax: +54 11 4714 1610

**Asia Pacific**

Flowserve Pte. Ltd.  
10 Tuas Loop  
Singapore 637345  
Telephone: +65 6771 0600  
Telefax: +65 6862 2329

Bulletin PS-40-2e (E) January 2016. © 2016 Flowserve Corporation

**To find your local Flowserve representative:**

For more information about Flowserve Corporation,  
visit [www.flowserve.com](http://www.flowserve.com) or call +1 937 890 5839.